

## HikCentral Professional

HikCentral Professional is a software platform provided by Hikvision for integrating and managing security systems. It is designed to meet a variety of security challenges on a single platform. With HikCentral Professional, you can manage multiple individual systems with ease, such as video security, access control, security alarms, and more, as well as explore cross-system functionalities.

Daily operations become more efficient while protection of people and property improve all around. Users of all kinds are making smarter decisions.



### Key Feature

#### Light and Efficient

- Lightweight architecture features reduced consumption of system resources
- Capable of managing multiple systems of varying sizes with consistent efficiency

#### Unified and Flexible

- Supports combining various application plug-ins under a unified, on-demand architecture for collaboration across business segments
- New plug-ins can be continuously developed to meet new business needs

#### Integrated and Open

- Compatible with virtually all Hikvision products and their abundance of applications, including deep-learning-based analytics and statistics
- Open architecture permits easy integration with third-party systems and hardware



## Software Specification

The following table shows the maximum performance of the SYS (System Management Server). For other detailed data and performance, refer to *Software Requirements and Performance*.

Features		Maximum Performance	
<b>General</b>			
<b>Manageable Resource</b>	Managed Devices <i>*Including Encoding Devices, Access Control Devices, Elevator Control Devices, Security Control Devices, Digital Signage Terminals, Remote Sites, Guidance Terminals, and IP Speakers</i>	2,048	
	Video Intercom Devices	5,000	
	Guidance Screens	512	
	Visitor Terminals	32	
	Dock Stations	1,500	
	Network Transmission Devices	128	
	Mobile Devices	1,000	
	Entrance/Exit Stations	40	
	Query Terminals	16	
	DeepinMind Server	64	
	Recording Servers	64	
	Streaming Servers	64	
	Areas	3,000	
	Cameras	10,000 With RSM: 100,000	
	Alarm Inputs	3,000	
	Alarm Outputs	3,000	
	Security Radars and Radar PTZ Cameras	30	
	Zones of Security Control Partitions	2,048	
	Security Control Partitions (Areas)	256	
	DS-5600 Series Face Recognition Terminals When Applied with Hikvision Turnstiles	32	
	ANPR Cameras	3,000	
	People Counting Cameras	Recommended: 300	
	Heat Map Cameras	Recommended: 70	
	Thermal Cameras	Recommended: 20 <sup>①</sup>	
	Queue Management Cameras	Recommended: 300	
	Cameras per Area	256	
	Alarm Inputs per Area	256	
	Alarm Outputs per Area	256	
	<b>Event &amp; Alarm</b>	Event and Alarm Rules	10,000
		Storage of Events or Alarms Without Pictures	1,000/s
		Storage of Events or Alarms with Pictures	20/s (Stored in SYS) 80/s (Stored in Recording Server)
		Events or Alarms Sent to Clients <i>*The clients include Control Clients and Mobile Clients.</i>	120/s 100 Clients/s
Combined Alarm		10/s	
User-Defined Events		10,000	
<b>User and Role</b>	Concurrent Accesses via Web Clients and Control Clients	100	
	Concurrent Accesses via Mobile Clients	100	
	Users	3,000	
	Roles	3,000	
	Users for Double Authentications	50	
<b>Person</b>	Person Group	3,000	

	Person Group Hierarchies	10
	Size of a Profile Picture	300 KB
	Total Size of Profile Pictures	300 GB
<b>Data Storage</b>	Data Retention Period	Stored for 3 Years
	People Counting	5 million
	Heat Map	0.25 million
	ANPR Records	60 million
	Events	60 million
	Alarms	60 million
	Access Records	1.4 billion
	Attendance Records	55 million
	Visitor Records	10 million
	Operation Logs	5 million
	Service Information Logs	5 million
	Service Error Logs	5 million
	Recording Tags	60 million
	<b>Report</b>	Scheduled Report Rules of Event and Alarm
Event or Alarm Rules in One Event/Alarm Report Rule		32
Records in One Sent Report		10,000 or 10 MB
Resources Selected in One Report <i>*With this limitation, you can generate a neat and clear report via the Control Client and it costs less time.</i>		20
<b>Video &amp; Intelligent Analysis</b>		
<b>Recording</b>	Recording Schedule	30,000
	Recording Schedule Template	200
<b>Face Comparison</b>	Face Pictures for Comparison	1,000,000
	Face Comparison Groups	64
	Persons in One Face Comparison Group	1,000,000
	Storage of Face Comparison Events Without Pictures	1,000/s
	Storage of Face Comparison Events with Pictures	100/s (Stored in Recording Server)
<b>Intelligent Recognition</b>	Intelligent Analysis Groups	1,000
	Resources in One Group	64
	Persons for Intelligent Recognition	1000,000
<b>Evidence Management</b>	Evidences	100,000
	Evidence Files	5,000,000
<b>Smart Wall</b>	Decoding Devices	32
	Smart Walls	32
	Views	1,000
	View Groups	100
	Views in One View Group	10
	Cameras in One View	256
<b>Streaming Server</b>	Video Input Bandwidth per Streaming Server	200 × 2 Mbps
	Video Output Bandwidth per Streaming Server	200 × 2 Mbps
<b>Access Control &amp; Time and Attendance &amp; Visitor</b>		
<b>Access Control</b>	Persons with Credentials for Access Control	50,000
	Total Credentials (Card + Fingerprint)	250,000
	Cards	250,000
	Fingerprints	100,000
	Profiles	50,000
	Access Points (Doors + Floors)	1,024
	Access Levels	512
	Access Schedules	32
	Templates for Card Printing	32
<b>Time and Attendance</b>	Persons for Time and Attendance	10,000
	Shift Schedules	128
	Major Leave Types	64

	Minor Leave Types of One Major Type	128
	Holidays	32
	Break Timetable	128
	Custom Rules for T&A Status on Device	128
<b>Visitor Management</b>	Visitors	20,000
	Visitor Check-In or Reservation Records	100,000
	Visitor Email Templates	20
	Entities in Watch List	10,000
<b>Vehicle and Parking Management</b>		
Vehicles per List		5,000
Vehicles		500,000
Custom Vehicle Types		10
Under Vehicle Surveillance Systems (UVSSs)		4
Vehicle Undercarriage Pictures		3,000
Storage of ANPR Alarm Without Pictures		1,000/s
Storage of ANPR Alarm with Picture		20/s (Stored in SYS) 100/s (Stored in Recording Server)
Parking Lots		10
Lanes		Total: 40 In One Parking Lot: 32
Parking Spaces		Total: 3,000 In One Floor: 1,024
Floors in All Parking Lots		128
Cards Linked with Vehicles		250,000
Temporary Cards in One Parking Lot		10,000
Vehicle Passing Frequency in Each Lane		1 Vehicle/s
<b>Mobile Monitoring</b>		
Fence Rules for One Vehicle		4
Vehicles Can Be Located in One Client		64
Retention Period of GPS Data		6 Months
Retention Period of Statistics Data		3 Years
<b>Digital Signage</b>		
Materials		10,000
Programs		2,000
Schedules		1,000
Release Records		1,000
<b>Security Inspection</b>		
Analyzers		8
Walk-Through Metal Detectors		64
Security Inspection Channels		1,000
<b>Broadcast</b>		
Broadcast Group		128
Media Libraries		100


①: This recommended value refers to the number of thermal cameras connected to the system directly. It depends on the maximum performance (data processing and storage) in the situation when the managed thermal cameras uploading temperature data to the system. For thermal cameras connected to the system via NVR, there is no such limitation.

## System Requirement

\* For high stability and good performance, the following system requirements must be met.

<b>OS for HikCentral Professional Server</b>	Microsoft® Windows 11 64-bit Microsoft® Windows 10 64-bit Microsoft® Windows 8.1 64-bit Microsoft® Windows 7 SP1 64-bit Microsoft® Windows Server 2019 64-bit Microsoft® Windows Server 2016 64-bit Microsoft® Windows Server 2012 R2 64-bit Microsoft® Windows Server 2012 64-bit Microsoft® Windows Server 2008 R2 SP1 64-bit <i>*For Windows 8.1 and Windows Server 2012 R2, make sure it is installed with the rollup (KB2919355) updated in April, 2014.</i>
<b>OS for Control Client</b>	Microsoft® Windows 11 64-bit Microsoft® Windows 10 64-bit Microsoft® Windows 8.1 64-bit Microsoft® Windows 7 SP1 64-bit Microsoft® Windows Server 2019 64-bit Microsoft® Windows Server 2016 64-bit Microsoft® Windows Server 2012 R2 64-bit Microsoft® Windows Server 2012 64-bit Microsoft® Windows Server 2008 R2 SP1 64-bit <i>*For Windows 8.1 and Windows Server 2012 R2, make sure it is installed with the rollup (KB2919355) updated in April, 2014.</i>
<b>Browser Version</b>	Google Chrome® 84 and above Firefox® 84 and above Safari® 11 and above Microsoft® Edge 89 and above Internet Explorer® 11 and above
<b>Database</b>	PostgreSQL V11.8
<b>OS for Mobile Client</b>	iOS 10.0 and above Android 6.0 and above
<b>Virtual Machine</b>	VMware® ESXi™ 6.x Microsoft® Hyper-V with Windows Server 2012/2012 R2/2016 (64-bit) <i>*The Control Client cannot run on the virtual machine.            *Refer to the Deployment Guide of HikCentral Professional on VMware Virtual Machines for how the streaming server running on the virtual machine.            *Virtual server migration is not supported.</i>

## Typical Application

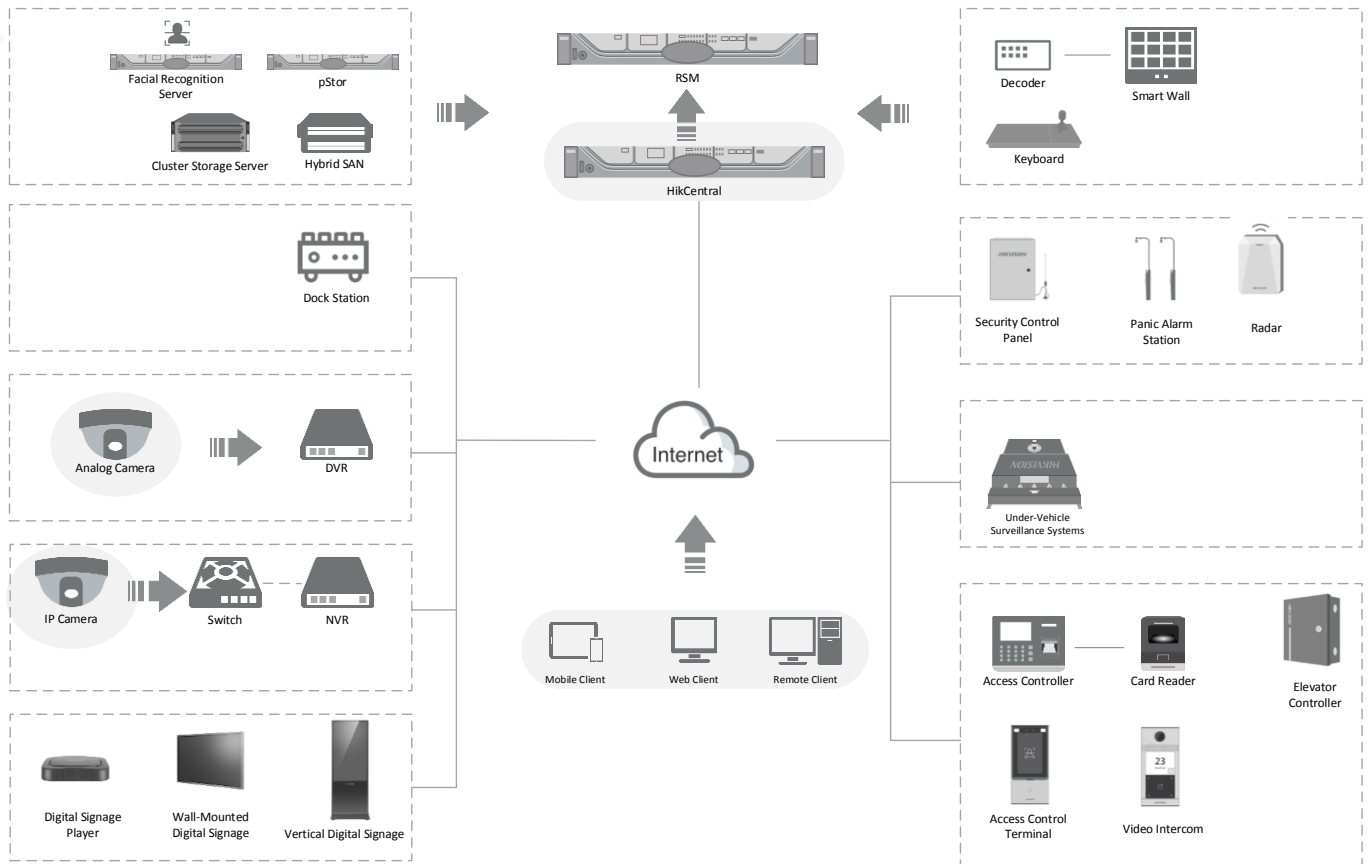

## Recommended Hardware Specification



<b>Processor</b>	Intel® Xeon® E-2124	
<b>Memory</b>	16G DDR4 DIMM slots, Supports UDIMM, up to 2666 MT/s, 64GB Max. Supports registered ECC	
<b>Storage Controllers</b>	Internal Controllers: SAS_H330 Software RAID: PERC S140 External HBAs: 12Gbps SAS HBA (non-RAID) Boot Optimized Storage Subsystem: 2x M.2 240GB (RAID 1 or No RAID), 1x M.2 240GB (No RAID Only)	
<b>Drive Bays</b>	1T 7.2K SATA×2	
<b>Power Supplies</b>	Single 250W (Bronze) power supply	
<b>Dimensions</b>	Form Factor: Rack (1U) Chassis Width: 434.00mm (17.08 in) Chassis Depth: 595.63mm (23.45 in) (3.5" HDD) <b>Note:</b> These dimensions do not include: bezel, redundant PSU	
<b>Dimensions with Package (W × D × H)</b>	750 mm × 614 mm × 259 mm (29.53" × 24.17" × 10.2")	
<b>Net Weight</b>	12.2 kg	
<b>Weight with Package</b>	18.5 kg	
<b>Embedded NIC</b>	2 x 1GbE LOM Network Interface Controller (NIC) ports	
<b>Device Access</b>	Front Ports: 1x USB 2.0, 1 x IDRAC micro USB 2.0 management port Rear Ports: 2 x USB 3.0, VGA, serial connector	
<b>Embedded Management</b>	iDRAC9 with Lifecycle Controller iDRAC Direct DRAC RESTful API with Redfish	
<b>Integrations and Connections</b>	Integrations: Microsoft® System Center VMware® vCenter™ BMC Truesight (available from BMC) Red Hat Ansible	Connections: Nagios Core & Nagios XI Micro Focus Operations Manager i (OMi) IBM Tivoli Netcool/OMNibus
<b>Operating Systems</b>	Certify XenServer Citrix® XenServer® Microsoft Windows Server® with Hyper-V <b>Note:</b> This model is installed with Microsoft Windows Server® 2016 multilingual operating system.	
<b>Virtual Machines</b>	VMware® ESXi	

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com